



Director™ 300 Indirect-Fired Tent Heater

Director 300



Clean, indirect-fired heat.

The Director 300, indirect-fired heater from L.B. White is ideal for tent heating applications requiring vented heat, the L.B. White Director 300 features a high efficiency heat exchanger that keeps heated and combustion air separate for the ultimate in clean, dry heat.

Clean, Quiet Performance

With a case designed for thermo-acoustic insulation and an attractive white baked enamel finish, the ductable Director 300 delivers quiet, reliable performance for a wide range of tent heating needs. Key features include:


- 294,000 Btu/h
- Automatic ignition
- High capacity fuel tank
- Powerful heat throw
- Electronic flame control
- Water resistant control box
- Ductable up to 75 feet
- Runs on kerosene or #1 diesel fuel
- Accessory thermostat and ducting available

Versatile Portability

With easy-to-roll, heavy-duty wheels and a built-in handle, moving the Director 300 from site to site is a breeze. And the Director 300's optional thermostat and up to 75 feet of ducting provide even greater placement flexibility.

Easy to Operate

The Director 300 heater is easy to set up and easy to use. In addition, the Director 300's compact, remote thermostat allows you to easily and efficiently manage temperatures within your tent where your activity is.

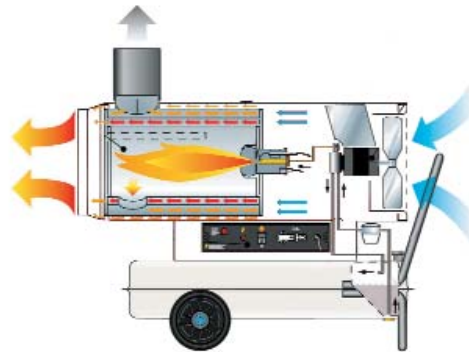

L.B. White... Experience You Can Count On

With over 20 years of event heating experience, L.B. White offers you the product quality, technical expertise and knowledgeable customer support you can count on to help you design the best heating solution for your needs.

For more information about L.B. White direct and indirect-fired tent heaters, please contact your local L.B. White representative or contact us directly at **800-345-7200**.



Director™ 300 Specifications

Director 300

Btu/h Rating:	
Input (Btu/h)	294,000
Output (Btu/h)	259,000
Heated Air Output (CFM):	2,531
Fuel Consumption (max.):	
Kerosene or #1 Diesel Fuel (gal./hr.)	2.17
Tank Capacity (gal.):	27.7
Ignition Type:	Direct Spark
Automatic Fuel Shut-off:	S
Electrical Supply (Volts / Hz / Phase):	110 / 60 / 1
Case Material:	Baked Enamel
Shipping Dimensions (in.):	
Length	66.5
Width	24.4
Height	44.0
Net Weight (lbs.):	297
Shipping Weight (lbs.):	352
Handle:	S
Wheels:	S
Thermostat (Weatherproof NEMA 4Xw/20ft. cord):	O
Flexible Air Duct (15.7in. dia. x 20ft. length):	O
Heavy Duty Duct Adapter:	O
Preheated Fuel Filter:	O
Stainless Steel Exhaust Pipe Extension (5.9in. x 3.3ft.):	O
Rain Cap:	O
Two Way Air Diverter:	O
Rain Cap:	O
CSA US/Canada Certification:	Yes

S = Standard O = Optional



Quality heaters you can count on.

Your L.B. White Dealer:

W6636 L.B. White Rd., Onalaska, WI 54650

(800) 345-7200

(608) 783-5691

(608) 783-6115, fax

www.lbwhite.com

© 2010 L.B. White Co.
All rights reserved.
All specifications are subject
to change without notice.

F#5000.1010