



NEW PORTABLE EVAPORATIVE COOLER

Combines the low operating costs your customers want with rental-ready features to protect your investment

Durable, no-fade case

3,100 CFM fan output for 950 sq. ft. of coverage

Digital control panel with option to adjust with remote.

Adjust airflow left to right, and up to down

Automatic pump shut-off


3-speed fan

Heavy-duty caster wheels

Water fill options

- Manual fill 10-gal. tank for 3-4 hr. runtime
- Leave connected for continuous fill

GFCI power plug

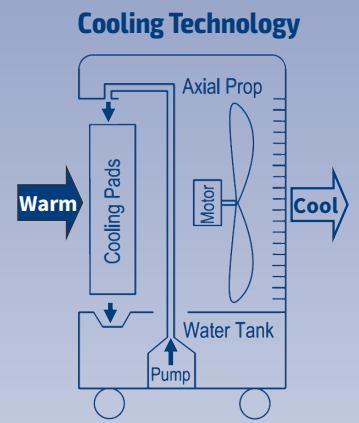

Water from an onboard tank is pumped to the top of a filter-like cooling pad. Then, a 3100 CFM fan pulls warm, environmental air over the filter and pushes out air with a cooling effect 30+ feet.

RENTAL-READY FEATURES

- Automatic pump shut-offs prevents pump burnout when water runs out
- Quiet operation at less than 60 dB
- Adjustable with louvers that allow airflow to be adjusted up or down
- Option to set run time

LOW OPERATING COST

- 10-gal water tank provides 3-4 hours of runtime with easy to read water level display
- Convenient garden hose connection for continuous fill.
- Operates from standard circuits with low amp draw and safe GFCI connection

NEW PORTABLE EVAPORATIVE COOLER

L.B.WHITE

Cooling Effect

Cooling Chart	Relative humidity						Feels Cooler °F (approx. 10ft away)
	20%	30%	40%	50%	60%	70%	
Ambient Temp °F	75°F	-24	-21	-18	-12	-14	-12
	80°F	-24	-22	-19	-17	-15	-13
	85°F	-26	-23	-20	-18	-15	-13
	90°F	-27	-24	-21	-18	-16	-13
	95°F	-28	-25	-22	-19	-16	
	100°F	-30	-26	-23	-19	-17	
	105°F	-31	-27	-24	-20	-17	
	110°F	-33	-28	-24	-21		
	115°F	-34	-29	-25	-21		

PORTABLE EVAPORATIVE COOLER	PC-31
COVERGE AREA	950 SQ. FT.
AIRFLOW DELIVERY	3,100 CFM
FAN MOTOR	1/5 H.P. 115 V 3 SPEED
POWER REQUIREMENT	115 V
AMPS	2.8
WATER TANK CAPACITY	10.3 GAL
RUN TIME PER TANK	3-4 HOURS
MAX WATER CONNECTION PRESSURE	50 PSI
UNIT DIMENSIONS	38"H X 24"W X 17"D
UNIT WEIGHT	45 LBS
ONE YEAR WARRANTY	



WORLD PROVIDER OF INNOVATIVE CLIMATE SOLUTIONS

411 Mason Street, Onalaska, WI 54650
 (800) 345 7200
 (608) 783 5691
 (608) 783 6115, fax
 www.lbwhite.com

© 2023 L.B. White Co.
 All rights reserved.
 All specifications are subject
 to change without notice.