L.B.WHITE®

NEW


EdenGlow™

TWO STAGE RADIANT INDOOR / OUTDOOR TUBE HEATER

Extend the comfort of your space year-round with the EdenGlow™ gas tube heater. Designed to provide efficient radiant heat, it's the perfect solution for patios, decks, restaurants, and any commercial or residential area that needs dependable warmth.

Benefits/Value:

- Available in two stage: 50,000 Btu/kW High Heat and 30,000 Btu/kW on Low Heat
- Ultra-low noise: 64 decibels
- Compact height provides ample overhead clearance
- Very low emissions compared to leading competitors
- Wind and rain protected sleek design
- Potted, water-resistant control board
- Sleek, tri-shield black coated steel and marine grade aluminum.
- Can be thermostatically controlled
- 3 year warranty on burner box and outer shell and 10 year warranty on tubes
- Wall or ceiling mount
- Comes fully assembled

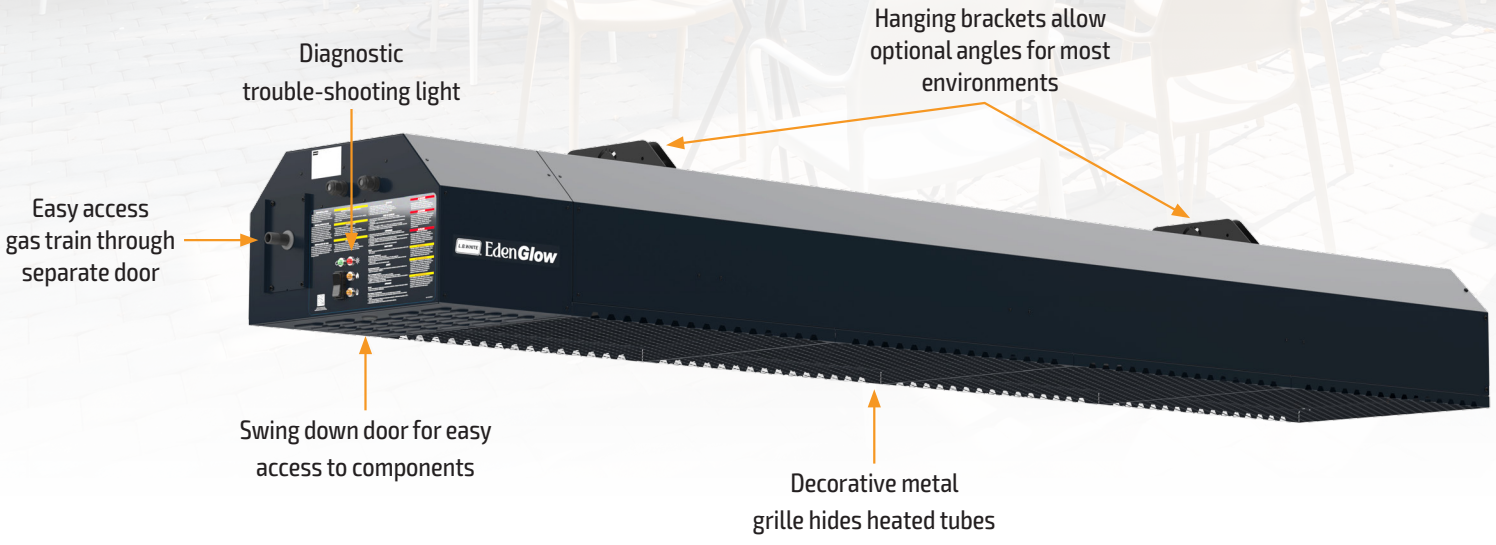

CA RESIDENTS:
⚠ WARNING
Cancer and reproductive harm. See www.P65Warnings.ca.gov.

Intertek


MANUFACTURING FACILITIES LOCATED IN THE USA


INNOVATIVE CLIMATE SOLUTIONS

411 Mason Street, Onalaska, WI 54650
(800) 345 7200
(608) 783 5691
(608) 783 6115, fax
www.lbwhite.com


© 2026 L.B. White Co.
All rights reserved.
All specifications are subject to change without notice.


EdenGlow			RT050
Maximum Input (Btu/h / kW)			50,000 / 14.65
Minimum Input (Btu/h / kW)			30,000 / 8.79
Fuel Consumption per Hour	LPG (lbs.)	MAX.	2.3
		MIN.	1.4
	NG (ft.^{3})	MAX.	50
		MIN.	30
Gas supply pressure acceptable for the purpose of input adjustment (in. W.C. / kPa)	LPG or NG		13.5 / 3.36
Burner manifold pressure (in. W.C. / kPa)	LPG or NG	MAX.	8.0 / 2.0
		MIN.	3.0 / 0.75
Ventilation air required to support combustion	140 CFM		
Motor characteristics	1/30 H.P., 3020 RPM, CW Rotation		
Electrical supply (Volts/Hz/Phase)	120/60/1		
Amp draw	Starting		1.16
	Continuous Operation		1.02
Heater weight (lbs. / kg)	215 / 97.5		
Heater dimensions (in./cm)	See below		

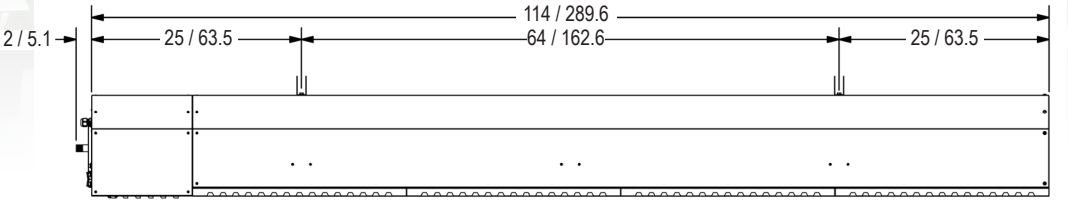



CLEARANCES TO COMBUSTIBLES, INCHES (CM)					
MOUNTING ANGLE*	TOP	SIDE		ENDS	BELOW**
		FRONT	BACK		
0°	12 (30.5)	15 (38.1)	15 (38.1)	12 (30.5)	66 (167.6)
30°	12 (30.5)	24 (70)	6 (15.2)	12 (30.5)	48 (121.9)





Accessories (sold separately):

- 500-135179, Plumbing Kit (Hose, sediment trap with shut-off)
- 500-135180, Non-Programmable Thermostat
- 500-135453, Fixed Horizontal Ceiling Mount
- 500-135454, Fixed 30° Corner Ceiling Mount

CA RESIDENTS:
WARNING
Cancer and reproductive harm. See
www.P65Warnings.ca.gov.