




NEW

GUARDIAN[®] 2.0 Forced Air Heaters


60
100
250
325

The best value in high quality,
dependable swine confinement heating.

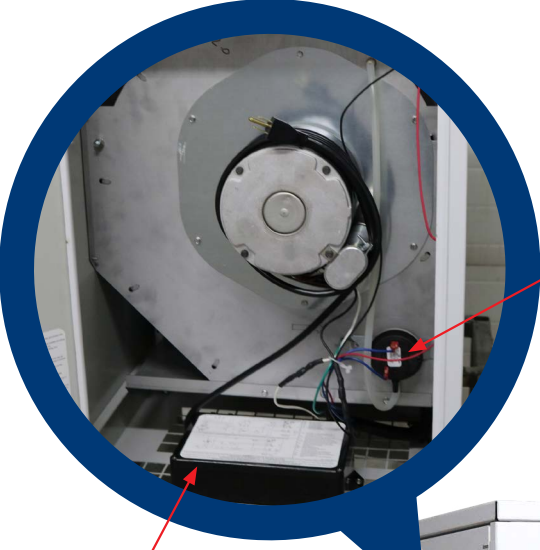

New pressure switch
reduces opportunities
for foreign objects and
mishandling

New spark igniter -
no separate flame sense
and new igniter position for
Hot Surface making it easier
to work on




Diagnostic light on outside
for better visibility

Waterproof control box
to protect control board

Improved locks provide
a more finished look and
better locking capability

Full doors
for more protection
during power washing

Doors fit internal
to wrapper



New agricultural gas
valve with additional
corrosion resistance

Feet added at base for
hardware clearance

No sharp edges

Guardian[®] 2.0 Forced Air Heater Specifications

Model:	Guardian 60 2.0	Guardian 100 2.0	Guardian 250 2.0	Guardian 325 2.0
Rating:				
Maximum Input (Btuh)	60,000	100,000	250,000	325,000
Minimum Input (Smart Sense)	60,000	50,000 (25,000)	160,000 (65,000)	200,000
Heater Configuration:				
Hot Surface Ignition	AW060	AW100	AW250	AW325
Spark Ignition	AD060	AD100	AD250	-
Pilot Ignition	-	-	AB250	-
Smart Sense [®] (Auto Modulating)	-	Available	Available	-
Fuel Consumption (max.):				
Liquid Propane Gas (lbs./hr.)	2.8	4.6	11.6	15.1
Natural Gas (cu. ft./hr.)	60.0	100	250	325
Heated Air Output (CFM)	240	400	1,050	1,700
Inlet Gas Supply Pressure				
Liquid Propane Gas min. / max. (in. W.C.)	11.0 / 13.5	11.0 / 13.5	11.0 / 13.5	11.0 / 13.5
Natural Gas min. / max. (in. W.C.)	7.0 / 13.5	7.0 / 13.5	7.0 / 13.5	7.0 / 13.5
Electrical Supply (Volts / Hz / Phase):	120/60/1	120/60/1	120/60/1	240/60/1
Amps (Starting / Cont. Oper.)				
Hot Surface Ignition	3.3 / 1.0	4.8 / 1.5	12.2 / 4.0	7.1 / 3.2
Spark Ignition	3.3 / 1.0	4.8 / 1.5	12.2 / 4.0	-
Pilot Ignition	-	-	7.3 / 4.5	-
Cabinet Material	Tri-shield Coating	Tri-shield Coating	Galvanized Steel*	Galvanized Steel
Dimensions (in.):				
Length	22.5	27	30.6	35.0
Width	12.75	14.0	18.0	22.0
Height	18.0	20.0	28.0	30.0
Net Weight (lbs.)	52.0	67.0	105.0	131.0
Shipping Weight (lbs.)	57.0	70.0	126.0	160.0
Accessories:				
Chain Hanging Kit	Optional	Optional	Optional	Optional
Air Diverter	Optional	Optional	Optional	Optional
Second Stage Regulator	Optional	Optional	Optional	Optional
Thermostat	Optional	Optional	Optional	Optional
Sediment Trap	Standard	Standard	Standard	Standard
Gas Hose (10ft.)	Optional	Optional	Optional	Optional
Installation Options:				
Indoor Mount	Yes	Yes	Yes	Yes
Outdoor Mount	Yes	Yes	Yes	Yes
CSA Certified	Yes	Yes	Yes	Yes

* Exclusive Tri-shield coating available for AD & AW heaters. Tri-shield coating consists of three unique protective layers including: a non-corrosive hot-dipped galvanized steel, an oven-cured epoxy primer and a baked, thermosetting polyester.

- Heaters ship standard to run at 0-2000 feet. To operate at higher altitudes, please note in order process to allow for appropriate deviation.



Innovative Climate Solutions

411 Mason Street, Onalaska, WI 54650
 800 345 7200 (toll free) or 608 783 5691
 608 783 6115 (fax)
 info@lbwhite.com | www.lbwhite.com

Your L.B. White Dealer:



Cancer and reproductive harm. See
www.P65Warnings.ca.gov.



© 2022 L.B. White Company
 All rights reserved.
 All specifications are subject
 to change without notice.