



NEW



H-40 Radiant Heat Brooder

The best value in high quality, dependable poultry heating.




Low Profile

The H-40 is only 14 inches tall and has a low profile, taking up less room in a house and making it easier to handle and work around.




Easy to Assemble

The H-40 is only five parts, making assembly quick and simple!

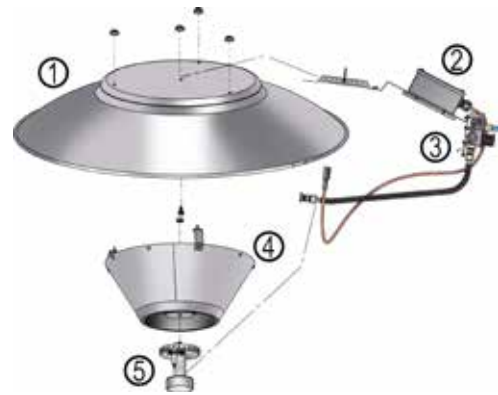

Energy Efficient

The H-40 utilizes more surface area on its smaller emitter than competitive units, yet creates a bigger heated area on the ground.

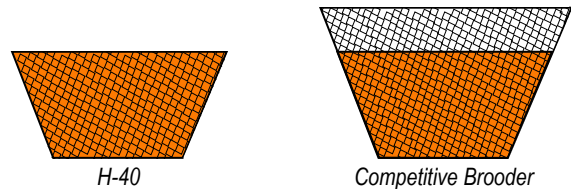

No Filter

No additional accessories to clean.

H-40 High Pressure Radiant Brooder Specifications

Model Numbers	H-40
Input (Btu/h)	40,000
Heater Configurations Available - Spark Ignition	Yes
Installation Height: (ft.) - Broilers - Turkeys	5 - 6 4.5 - 5.5
Center Spacing (ft.)	25 - 40
Inlet Gas Supply Pressure (PSI)	5
Fuel Consumption (max.): - Liquid Propane Gas (lbs/hr) - Natural Gas (cu. ft/hr)	1.85 40.0
Ventilation (CFM)	468
Temperature Controls Available: - Wired to House Environmental Control	Yes
Electrical Requirements: - Spark Ignition	120 VAC / 60HZ
Minimum Clearance to Combustibles (inches) - Top - Side - Below	14 36 54
Dimensions (in.): - Height - Canopy Diameter	14 31.5
Net Weight (lbs.)	14.0
Canopy:	Polished Aluminum
Stainless Steel Radiant Emitter:	S
1/4" x 6' Gas Hose (up to 25 ft.)	O
Regulator (Zone Control Panel):	O
Gas Cock and Piping Hardware:	O
CSA Certified (USA and Canada)	Yes

S=Standard
O=Optional



Innovative Heating Solutions

411 Mason Street, Onalaska, WI 54650
800 345 7200 (toll free) or 608 783 5691
608 783 6115 (fax)
info@lbwhite.com | www.lbwhite.com

Your L.B. White Dealer:



WARNING
Cancer and reproductive harm.
See www.P65Warnings.ca.gov.



© 2018 L.B. White Company
All rights reserved.
All specifications are subject
to change without notice.